



PRODUCT SELECTION GUIDE

www.earelay.com



Add: Yueqing Economic Development Zone, Yueqing City, Zhejiang Province, China. - 325600

Contact: Tony Jiang

Email: sales@earelay.com

Mob/Whatsapp no.: 0086-18815129119

WENZHOU NINGYUE ELECTRIC TECHNOLOGY CO., LTD.




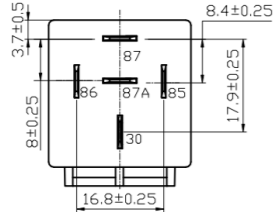
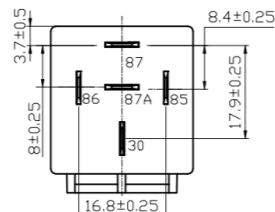
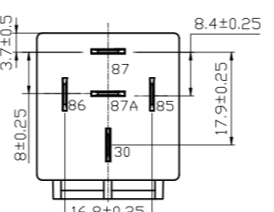
COMPANY PROFILES




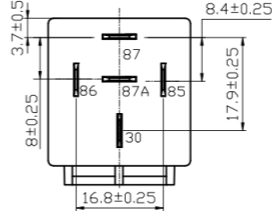
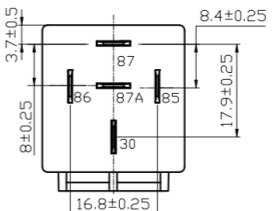
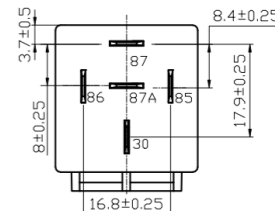
EA Relay was founded for the purpose of designing, developing, manufacturing, and sales of automotive relay, starter relay, auto switch, battery isolator, car flasher and automotive wiring harness.


The products are favored by their stable quality and excellent cost-effectiveness in the market and exported to Europe, the Americas, the Middle East, Southeast Asia, and other parts of the world.




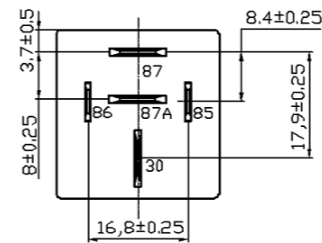
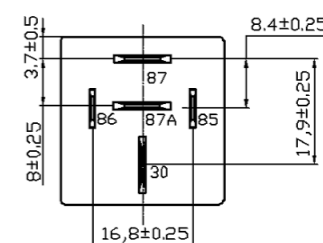
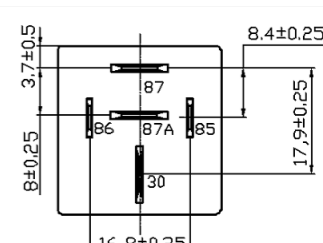
Welcome friends from all over the world to visit our company, negotiate business, strengthen technical cooperation and exchanges.



Mold no.	551	551P	551M
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X28.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1B; 1U; 1C	1A; 1B; 1U; 1C	1A; 1B; 1U; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	551C	551L	551D
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X28.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			



Mold no.	552	552P	552M
Photos			
Outline Dimension	26.0X26.0X25.0mm	26.0X26.0X25.0mm	26.0X26.0X25.0mm
Contact Form	1A; 1B; 1U; 1C	1A; 1B; 1U; 1C	1A; 1B; 1U; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			







Mold no.	553	553P	553M
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X28.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	70/80A	70/80A	70/80A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			







Mold no.	553K	553N	554
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X28.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	70/80A	70/80A	70/80A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	554E	555	555K
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X28.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	70/80A	30/40A	70/80A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	556	556K	557
Photos			
Outline Dimension	28.0X26.0X25.0mm	28.0X26.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	70/80A	70/80A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	557C	557L	557D
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X28.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	558	558P	559
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X28.0X25.0mm	28.0X28.0X20.0mm
Contact Form	1A; 1U; 1C	1A; 1U; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	560	561	562
Photos			
Outline Dimension	26.0X26.0X25.0mm	28.0X28.0X20.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	70/80A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	563	563L	563D
Photos			
Outline Dimension	28.0X28.0X25.0mm	28.0X25.0X25.0mm	28.0X28.0X25.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	564	564P	564S
Photos			
Outline Dimension	28.0X23.0X30.0mm	28.0X23.0X30.0mm	28.0X23.0X30.0mm
Contact Form	1A	1A	1A
Contact Rating	40A	40A	40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	565	565R	565G
Photos			
Outline Dimension	28.0X25.0X30.0mm	28.0X25.0X30.0mm	28.0X25.0X30.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			





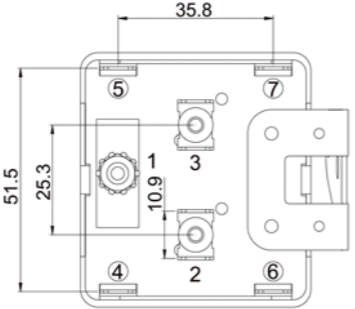
Mold no.	566	566R	566Y
Photos			
Outline Dimension	23.0X15.5X25.5mm	23.0X15.5X25.5mm	23.0X15.5X25.5mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	566B	567	568
Photos			
Outline Dimension	23.0X15.5X25.5mm	23.0X15.5X25.5mm	23.0X15.5X15.5mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	569	570	571
Photos			
Outline Dimension	23.0X15.5X25.5mm	25.0X23.0X25.5mm	25.0X23.0X25.5mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	572	573	575
Photos			
Outline Dimension	15.0X15.0X20.0mm	12.5X12.0X10.0mm	17.0X15.0X20.0mm
Contact Form	1A	1A; 1C	1A; 1C; 1U; 1W
Contact Rating	20A	20/10A	20/10A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.1W	1.1W	1.1W
Mounting Dimension			







Mold no.	575C	576	576C
Photos			
Outline Dimension	17.0X15.0X20.0mm	26.0X21.0X21.0mm	26.0X21.0X21.0mm
Contact Form	1A; 1C; 1U; 1W	1A; 1C	1A; 1C
Contact Rating	20/10A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.1W	1.8W	1.8W
Mounting Dimension			





Mold no.	577	578C	579
Photos			
Outline Dimension	60.0X50.0X36.0mm	60.0X55.0X35.0mm	68.0X31.0X33.0mm
Contact Form	1A	1A	1A
Contact Rating	2X50A	2X40A	40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	579C	580C	581
Photos			
Outline Dimension	68.0X31.0X33.0mm	35.0X34.0X60.0mm	92.0X34.0X60.0mm
Contact Form	1A	1A	1A
Contact Rating	40A	40A	40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

Mold no.	590	590M	590K
Photos			
Outline Dimension	26.0X26.0X25.0mm	26.0X26.0X25.0mm	26.0X26.0X25.0mm
Contact Form	1A	1A	1A
Contact Rating	30A	30A	70A
Contact Voltage	14VDC; 28VDC	110VDC; 85VDC	110VDC; 72VDC
Coil Power	1.6W	1.6W	1.6W
Mounting Dimension			

Mold no.	590M	590N	590NM
Photos			
Outline Dimension	26.0X26.0X25.0mm	26.0X26.0X25.0mm	26.0X26.0X25.0mm
Contact Form	1A	1A	1A
Contact Rating	70A	70A	70A
Contact Voltage	110VDC; 72VDC	110VDC; 72VDC	110VDC; 72VDC
Coil Power	1.6W	1.6W	1.6W
Mounting Dimension			


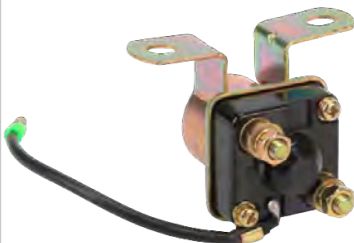

Mold no.	850	851	852
Photos			
Outline Dimension	45.0X45.0X45.0mm	45.0X45.0X45.0mm	45.0X45.0X45.0mm
Contact Form	1A	1A	1A;1C
Contact Rating	120A	200A	250A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	2.4W; 4.8W	2.4W; 4.8W	2.4W; 4.8W
Mounting Dimension			

Mold no.	853	854	855
Photos			
Outline Dimension	50.0X50.0X50.0mm	44.0X34.0X33.0mm	44.0X34.0X33.0mm
Contact Form	1A	1A	1A
Contact Rating	300A	120A	200A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	2.4W; 4.8W	2.4W; 4.8W	2.4W; 4.8W
Mounting Dimension			







Mold no.	856	857	858
Photos			
Outline Dimension	62.0X40.0X55.0mm	62.0X40.0X55.0mm	40.0X35.0X40.0mm
Contact Form	1A	1A	1A
Contact Rating	150A	150A	150A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	4.1W	4.1W	4.1W
Mounting Dimension			

Mold no.	859	860	861
Photos			
Outline Dimension	34.0X34.0X40.0mm	90.0X58.0X50.0mm	90.0X58.0X50.0mm
Contact Form	1A	1A	1A
Contact Rating	75A	200A	300A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	4.1W	4.1W	4.1W
Mounting Dimension			

Mold no.	870	871	872
Photos			
Outline Dimension	80.0X56.0X85.0mm	50.0X45.0X100.0mm	50.0X45.0X100.0mm
Contact Form	1A	1A	1A
Contact Rating	500A	100A	100A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	4.8W	4.8W	4.8W
Mounting Dimension			

Mold no.	873	875	876
Photos			
Outline Dimension	55.0X55.0X60.0mm	55.0X55.0X60.0mm	45.0X45.0X60.0mm
Contact Form	1A	1A	1A
Contact Rating	100A	150A	80A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	4.8W	4.8W	4.8W
Mounting Dimension			

Mold no.	880	881	882
Photos			
Outline Dimension	59.0X30.0X40.0mm	110.0X70.0X82.0mm	110.0X70.0X82.0mm
Contact Form	2A; 2C	2A; 2C	2A; 2C
Contact Rating	100A	600A	600A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	14.4W	30W	30W
Mounting Dimension			

Mold no.	883	885	886
Photos			
Outline Dimension	80.0X59.0X80.0mm	80.0X59.0X80.0mm	100.0X55.0X85.0mm
Contact Form	2A; 2C	2A; 2C	2A; 2C
Contact Rating	250A	250A	500A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	30W	30W	30W
Mounting Dimension			

Mold no.	650	651	652
Photos			
Outline Dimension	50.0X45.0X100.0mm	50.0X45.0X100.0mm	132.0X65.0X90.0mm
Contact Form	1A	1A	1A
Contact Rating	250A	125A	300A
Coil Voltage	12/24V	12/24V	12/24V
Coil Power	2.4W	2.4W	2.4W
Mounting Dimension			

Mold no.	653	655	656
Photos			
Outline Dimension	68.0X68.0X74.0mm	70.0X70.0X122.0mm	70.0X70.0X82.0mm
Contact Form	1A	1Pole	2Pole
Contact Rating	600A	400A	500A
Coil Voltage	12/24V	12/24V	12/24V
Coil Power	2.4W	2.4W	2.4W
Mounting Dimension			

Mold no.	660	661	662
Photos			
Outline Dimension	68.0X68.0X53.0mm	148.0X128.0X44.0mm	148.0X128.0X44.0mm
Contact Form	1A	1A	1A
Contact Rating	140A	140A	150A
Coil Voltage	12/24V	12/24V	12/24V
Coil Power	2.4W	2.4W	2.4W
Mounting Dimension			

Mold no.	663	665	666
Photos			
Outline Dimension	148.0X128.0X44.0mm	148.0X128.0X44.0mm	148.0X128.0X44.0mm
Contact Form	1A	1A	1A
Contact Rating	200A	250A	300A
Coil Voltage	12/24V	12/24V	12/24V
Coil Power	2.4W	2.4W	2.4W
Mounting Dimension			

Mold no.	680	681	682
Photos			
Outline Dimension	295.0X235.0X131.0mm	390.0X206.0X106.0mm	390.0X206.0X106.0mm
Coil Voltage	12/24V	12/24V	12/24V
Function	Main Power Control	Main Power Control	Main Power Control
Usage Area	Construction machine Passanger car Special vehicle Logistics vehicle Heavy truck	Construction machine Passanger car Special vehicle Logistics vehicle Heavy truck	Construction machine Passanger car Special vehicle Logistics vehicle Heavy truck
Mounting Dimension			

Mold no.	683	685	686
Photos			
Outline Dimension	390.0X206.0X106.0mm	237.0X171.0X125.0mm	155.0X145.0X65.0mm
Coil Voltage	12/24V	12/24V	12/24V
Function	Main Power Control	Main Power Control	Main Power Control
Usage Area	Construction machine Passanger car Special vehicle Logistics vehicle Heavy truck	Construction machine Passanger car Special vehicle Logistics vehicle Heavy truck	Construction machine Passanger car Special vehicle Logistics vehicle Heavy truck
Mounting Dimension			

Mold no.	750	751	752
Photos			
Outline Dimension	25X25X30mm	25X25X30mm	25X25X30mm
Frequency	58	58	Adjustable
Contact Rating	20A	20A	20A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1W	1W	1W

Mold no.	753	755	756
Photos			
Outline Dimension	25X25X30mm	25X25X30mm	25X25X30mm
Frequency	Adjustable	58	Adjustable
Contact Rating	20A	20A	20A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1W	1W	1W

Mold no.	757	758	759
Photos			
Outline Dimension	25X25X30mm	25X25X30mm	25X25X30mm
Frequency	Adjustable	58	Adjustable
Contact Rating	20A	20A	20A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1W	1W	1W

Mold no.	760	761	762
Photos			
Outline Dimension	25X25X30mm	25X25X30mm	25X25X30mm
Frequency	Adjustable	Adjustable	Adjustable
Contact Rating	20A	20A	20A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1W	1W	1W

Mold no.	320	321	322
Photos			
Outline Dimension	19.5X15.5X15.5mm	15.5X12.2X14.0mm	32.0X27.0X20.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	10/15A	15/20A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	0.36-1W	0.36-1W	1.8W
Mounting Dimension			

Mold no.	323	325	326
Photos			
Outline Dimension	32.0X28.0X28.0mm	32.0X28.0X28.0mm	32.0X28.0X28.0mm
Contact Form	1A; 1C	1A; 1C	1A; 1C
Contact Rating	30/40A	30/40A	30/40A
Coil Voltage	12V; 24V	12V; 24V	12V; 24V
Coil Power	1.8W	1.8W	1.8W
Mounting Dimension			

