


VIRGO RECEIVER

- Communicates via Profibus, Profinet or CAN open module
- Dual CAN receiver
- Freely programmable LCD on the hand transmitter
- Available with 2 safety relays

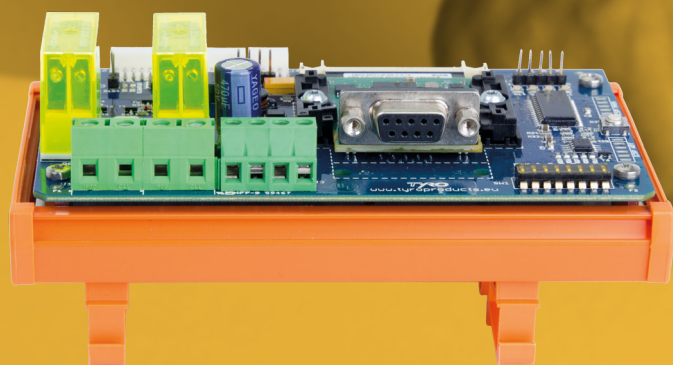

TECHNICAL SPECIFICATIONS

Max. current load	Optional with 2 safety relays, max 8A per relay
Max. switching voltage	Max 230V AC or 50V DC
Power supply	8 - 40 VDC, 8 - 24 VAC
Degree of protection	-
Certification	CE, RED, EMC, LVD / E4 (automotive)
Digital outputs	-
Digital inputs	-
Analog outputs	-
Analog inputs	-
Bus networks	Choose from: CAN open, Profi bus, Profi net, RS232
Communication mode	Simplex, optional Duplex
Frequency	433 MHz or 868 MHz
Modulation	Broadband, narrow band
Dimensions excl. antenna	143 x 87 x (without relays: 67, with relays: 78)
Antenna type	BNC
Weight	305 gram
Temperature range	-40°C / +85°C
Reaction time	< 0.1 sec